


NEW! Halogen Free CONDUITS

HF Halogen
FREE

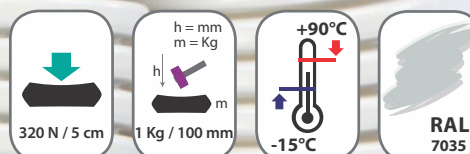

*****Made of Polypropilene (PP)**

- environmentally friendly material and does not contain harmful substances.

Halogen-Free (PP) - series pipes have improved mechanical characteristics and are safe in case of indoor fires due to the absence of halogen compounds (Chlorine / Fluorine, etc.), which can not lead to poisoning and suffocation in case of fire.

New Halogen Free Conduits

COMBO HALOGEN FREE FLEXIBLE CONDUITS EASY TYPE 320N



| CODE | TYPE | DIMENSIONS | | COLOR | U.M. | LENGTH | PACKAGING |
|--------------|------|------------|----------|-------|------|--------|-----------|
| | | EXT Ø mm | INT Ø mm | | | | |
| 31-21070-016 | 16 | 16 | 10,7 | GREY | M | 100 | 100 |
| 31-21071-020 | 20 | 20 | 14,1 | GREY | M | 100 | 100 |
| 31-21072-025 | 25 | 25 | 18,3 | GREY | M | 50 | 50 |
| 31-21073-032 | 32 | 32 | 24,3 | GREY | M | 25 | 25 |
| 31-21074-040 | 40 | 40 | 31,2 | GREY | M | 25 | 25 |
| 31-21075-050 | 50 | 50 | 39,6 | GREY | M | 25 | 25 |

GENERAL DESCRIPTION


- Corrugated (spiral), pliable.
- Suitable for light mechanical loads.
- Made of Polypropilene (PP).
- Self extinguishing; flame retardant.

PROPERTIES


Resistance to compression - (compression force) at 22 ± 2 °C
 Resistance to Impact - (Weight mass / Fall Height) at -5 °C
 Minimum temperature limit
 Maximum temperature limit
 Dielectric strength
 Insulation resistance

CLASSIFICATION

> 320 N / 5cm 2
 m:1kg / h:100mm 2
 -15° C 3
 +90° C 2
 2 kv / 15 min
 > 100 MΩ

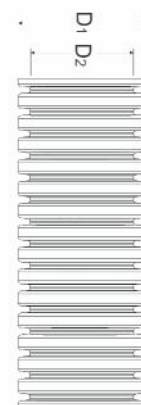

APPLICATION STANDARDS: EN 61386-1/2004, EN 61386-21/2004



COMBO HALOGEN FREE RIGID CONDUITS EASY TYPE 320N





| CODE | TYPE | DIMENSIONS | | COLOR | U.M. | LENGTH | PACKAGING |
|--------------|------|------------|----------|-------|------|--------|-----------|
| | | EXT Ø mm | INT Ø mm | | | | |
| 30-21070-016 | 16 | 16 | 13,5 | GREY | M | 3 | 102 |
| 30-21071-020 | 20 | 20 | 17,3 | GREY | M | 3 | 102 |
| 30-21072-025 | 25 | 25 | 22,1 | GREY | M | 3 | 75 |
| 30-21073-032 | 32 | 32 | 28,9 | GREY | M | 3 | 51 |
| 30-21074-040 | 40 | 40 | 36,6 | GREY | M | 3 | 51 |
| 30-21075-050 | 50 | 50 | 46,1 | GREY | M | 3 | 51 |

GENERAL DESCRIPTION

- Rigid.
- Suitable for light mechanical loads.
- Made of Polypropilene (PP).
- Self extinguishing; flame retardant.

APPLICATION STANDARDS: EN 61386-1/2004, EN 61386-21/2004



KOUROUPIS - BINIARIS S.A.

Solomos, 201 00 Corinth, Greece

Telephones: (+30 27410) 31490, 31955, 31836

Fax: (+30 27410) 31618 E-mail: info@courbi.com

www.courbi.com